



SXR AUDIO STAND CABLE ORGANIZER

A Low Noise Floor Is Fundamental

Introduction

Thank you for purchasing the SXR Cable Organizer for your Harmonic Resolution Systems SXR Audio Stand.

The SXR Cable Organizer attaches horizontally to the back of the SXR Audio Stand with ease, and is a very low-maintenance item that will provide many years of trouble-free performance.

The SXR Cable Organizer is primarily to clean up the look of your system, as well as provide a more cosmetic appearance. The SXR Cable Organizer will secure component cables to the SXR Audio Stand. This adds stability, but it is not intended to be a performance option.

Please read this manual completely prior to assembly and use of your SXR Cable Organizer with your SXR Audio Stand. It contains instructions necessary for proper assembly, use, and care of this system. Proper care of your SXR Cable Organizer will ensure optimum performance and an aesthetically appealing system.

All HRS products are manufactured in the US by highly skilled craftsmen using superior techniques, and proprietary materials. HRS is dedicated to producing the finest audio products in the world. To accomplish that, all products advance through a series of intense inspection and approval protocol. All items are inspected 100% to verify the assembly fits are up to our exacting standards. This rigorous protocol, combined with precision design, results in a product that is a pleasure to install, use, change, or expand at any time. From all of us here at HRS, we truly hope you enjoy our product.



**Scan here to register for HRS
5-year limited warranty**
<https://avisolation.com/company-warranty/>

Your order was built and inspected by the following HRS staff

Manufacturing: _____

Inspection: _____

Packaging: _____

Setup Instructions

Step 1. Verify that for each SXR Cable Organizer grid, there are four #5-40×1/2” fasteners and two SXR Cable Organizer Strut Assemblies (photo 1). The SXR Cable Organizer Strut Assemblies should each have two 10-32×1 1/2” fasteners installed.

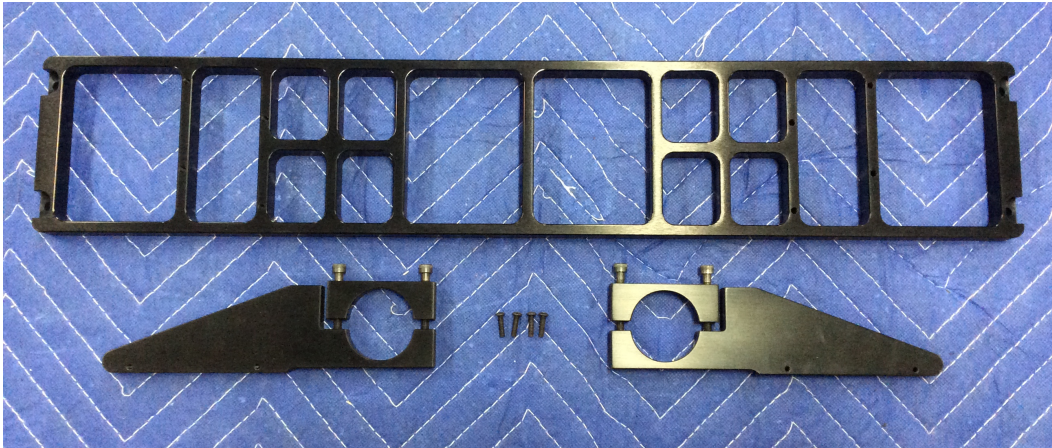


Photo 1

The SXR Cable Organizer should only be installed on an already fully assembled SXR Audio Stand. If you received your SXR Cable Organizer and SXR Audio Stand together, assemble and set up the SXR Audio Stand first.

Step 2. Remove the 10-32×1 1/2” fasteners from one SXR Cable Organizer Strut Assembly by turning them counterclockwise until the threads disengage. The SXR Cable Organizer Strut Assembly should separate into its two parts (photo 2).



Photo 2

Hold the two parts of the SXR Cable Organizer Strut Assembly on either side of one of the Struts at the rear of the SXR Audio Stand, and then reinstall both 10-32×1 1/2” fasteners. Orient the SXR Cable Organizer Strut Assembly so that it points out directly behind the SXR Audio Stand, with

the heads of the #10-32×1½” fasteners pointing out to the side of the SXR Audio Stand (photo 3). The SXR Cable Organizer can be fastened at whatever height will best accomplish your cable management goals, but HRS recommends that it sits about 2” below an SXR Horizontal Support Assembly.



Photo 3

Tighten the #10-32×1½” fasteners by hand first, then use the provided ratchet wrench with a $\frac{5}{32}$ ” hex bit to tighten them (photo 4) until they stay in place on their own. Do not torque the assembly tightly in place yet. Final torque will be applied after all parts of the SXR Cable Organizer are in place. Attach the second SXR Cable Organizer Strut Assembly at the same height, on the other Strut at the rear of the SXR Audio Stand. Make sure the two SXR Cable Organizer Strut Assemblies are level and parallel to each other by laying the SXR Cable Organizer Grid across them, and checking it with the level provided with your SXR Audio Stand (photo 5).



Photo 4



Photo 5

Step 3. Make sure the four counterbored holes in the SXR Cable Organizer Grid line up with the small threaded holes on the SXR Cable Organizer Strut Assemblies (photo 6). If all four holes cannot line up simultaneously, the two SXR Cable Organizer Strut Assemblies are not aligned

correctly. All four holes will line up when the two SXR Cable Organizer Strut Assemblies are level and parallel to each other.



Photo 6

Use the provided $\frac{5}{64}$ " Allen wrench to install and tighten one of the four provided #5-40 $\times\frac{1}{2}$ " fasteners at each of the counterbored locations. Apply just enough torque to begin twisting the Allen wrench after each fastener stops turning. Once the SXR Cable Organizer Grid is secured by all four fasteners, use the ratchet wrench with a $\frac{5}{32}$ " hex bit to apply final torque to the #10-32 $\times\frac{1}{2}$ " fasteners that grip the Struts. Tighten these fasteners about one-quarter turn past when they become snug.

Care and Maintenance

The SXR Cable Organizer is a very low maintenance item that will provide many years of trouble-free performance by applying these basic care instructions.

Clean the external surfaces of the SXR Cable Organizer using a professional quality ultra-soft lint-free microfiber cloth available in high quality automotive stores. Use a damp cloth if you need to clean dirt from the audio stand. Do not use commercial furniture polishes on the SXR Cable Organizer.

Do not spray, soak, or submerge the SXR Cable Organizer in water or cleaning solutions. Submerging, spraying, or soaking the SXR Cable Organizer may cause permanent damage to the assembly.

Clean the metallic parts of the SXR Cable Organizer using a lint-free soft (non-abrasive) cloth. Use a damp cloth with a mild soap or Pledge Multi-Surface Cleaner if required. Do not use abrasive cleaners or solvents to clean the SXR Cable Organizer, as they will damage the quality of finish. Solvents and solvent-based cleaners will attack and damage some of the materials used in the SXR Cable Organizer, and should never be used.

Limited Warranty



Scan here to register for HRS 5-year Limited Warranty

Harmonic Resolution Systems warrants the product designated herein to be free of manufacturing defects in material and workmanship, subject to the conditions herein set forth, for a period of 90 days from the date of purchase by the original purchaser. **The purchaser is required to register the unit with Harmonic Resolution Systems by visiting <https://avisolation.com/company-warranty/> and completing the limited warranty registration, within 14 days upon receipt of any HRS product. Scan QR code to register for HRS 5-year limited warranty.**

The limited warranty extends the 90 days to a period of 5 years from the date of purchase by the original purchaser, or no later than 6 years from the date of shipment to the authorized Harmonic Resolution Systems dealer, whichever comes first.

This limited warranty is subject to the following conditions and limitations.

1. The limited warranty is void and inapplicable if the product has been used or handled other than in accordance with the instructions in the owner's manual, abused or misused, damaged by accident or neglect or in being transported, or the defect is due to the product being repaired or tampered with or modified by anyone other than Harmonic Resolution Systems. The product must be packed and returned to Harmonic Resolution Systems by the customer at his or her sole expense. A written description of the defect and a photocopy of the original purchase receipt must accompany a returned product. This receipt must clearly list the model and serial number, the date of purchase, the name and address of the purchaser, the authorized HRS dealer, and the purchase price. Harmonic Resolution Systems reserves the right to modify the design of any product without obligation to purchasers of previously manufactured products, and to change the prices or specifications of any product, without notice or obligation to any person. This warranty is void and inapplicable if the product has been handled other than in accordance with the instructions specified within this document, abused or misused, damaged by accident or neglect or in being transported, or the defect is due to the product being tampered with, modified or repaired by anyone other than Harmonic Resolution Systems.

2. The limited warranty does not cover normal recommended care and maintenance. Harmonic Resolution Systems Inc. shall not be responsible in any way for consequential or indirect damages or liabilities resulting from the use of the product covered herein, or, resulting from any breach of this warranty or any implied warranty relating to said product.

3. Harmonic Resolution Systems shall not be responsible in any way for damage to finishes resulting from normal use, or exposure to sunlight or the environment, even within the normal and extended limited warranty period.

During the limited warranty period, Harmonic Resolution Systems will repair or replace any defective components free of charge. A Return Authorization Number (RA Number) obtained directly from Harmonic Resolution Systems is required before any product is returned to Harmonic Resolution Systems for any reason. This number must be visible on the exterior of the shipping container(s) for Harmonic Resolution Systems to accept the return.

Units shipped to Harmonic Resolution Systems Inc. without a visible RA Number on the exterior of the shipping container(s) are subject to be returned to the sender, freight collect.

Units to be repaired by Harmonic Resolution Systems must be sent shipping and insurance prepaid by the original purchaser in the original packaging material. A returned product should be accompanied by a written description of the defect.

Repaired units will be returned by Harmonic Resolution Systems shipping, and insurance will be prepaid by the customer.

All other warranties or conditions, either written or implied, are void.

(MADE IN USA)

All Harmonic Resolution Systems Inc. products are 100% made in The United States of America by skilled craftsmen using only the finest materials and our personal dedication to the highest workmanship standards.

HARMONIC RESOLUTION SYSTEMS INC.
2495 Main Street, Suite 227
Buffalo, NY 14214
Telephone: 716-873-1437
Web: www.AVisolation.com
E-mail: sales@AVisolation.com